
SAKRAL ROUND CUT

- Eye-catching peak and trough structure
- Robust appearance thanks to the impressive thickness of its material
- If requested, the surface can be roughened to aid the rapid development of a natural patina
- Especially suitable for old church roofs, castles and palaces
- Natural, timeless and dignified beauty
- Configure roofs to suit your needs, thanks to the wide range of cut shapes

TECHNICAL DATA

Size (appr.)	180 x 380 x 18 mm
Max. coverage width (approx.)	180 mm
Min. gauge (approx.)	145 mm
Covering length on av. approx.	155 mm
Max. gauge (approx.)	165 mm
Average tile requirement (approx.)	36 pcs/m²
Unit weight (approx.)	2.5 kg/piece
Weight per m² (approx.)	90 kg/m²
Weight per pallet (approx.)	925 kg
Pcs per mini-pack	6 piece
Pcs per pallet	360 piece

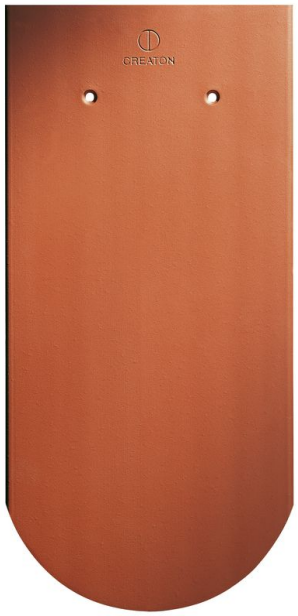


APPLICATIONS


ADDITIONAL MEASURES ACCORDING TO CREATON MANUFACTURER'S SPECIFICATIONS	
Standard roof pitch CREATON DE in combination with additional measures according to manufacturer's specificationsStandard roof pitch CREATON DE in combination with additional measures according to manufacturer's specifications	24 °
Installation of a trussing sheet/glued sub-roof without nail seals, possible CREATON products: DUO extra, DUO longlife ND extra, DUO longlife PV extra, TRIO extra, TRIO longlife extra, QUATTRO longlife extra	≥ 24 °
Installation of a trussing sheet/glued sub-roof without nail seals, possible CREATON products: DUO longlife ND extra	≥ 22 °
Installation of a trussing sheet/glued sub-roof with nail seals, possible CREATON products: DUO extra, DUO longlife ND extra, DUO longlife PV extra, TRIO extra, TRIO longlife extra, QUATTRO longlife extra	≥ 22 °
Installation as a rainproof sub-roof, possible CREATON products: DUO longlife ND extra, TRIO extra, TRIO longlife extra, QUATTRO longlife extra	≥ 18 °
Installation as a watertight sub-roof, possible CREATON products: QUATTRO longlife extra	≥ 10 °
Installation as a watertight sub-roof welded in a 7° special solution, please observe separate installation guidelines, possible CREATON products: QUATTRO longlife extra	-

TECHNICAL INFORMATIONS


- Please consider the sample letter for the standard CREATON roof pitches.

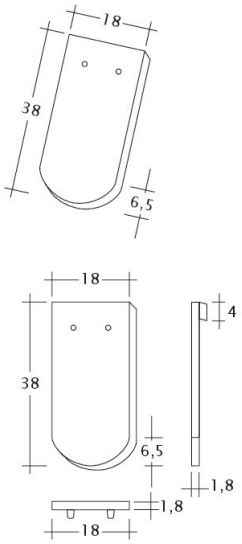


Drawing SAKRAL 1-1

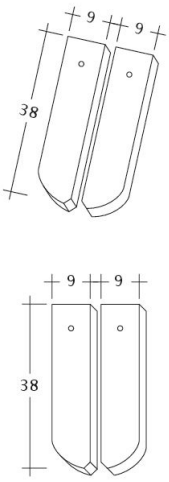


Drawing SAKRAL 1-2

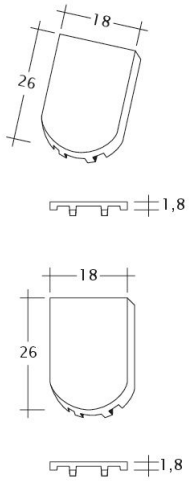


Drawing SAKRAL FALZ

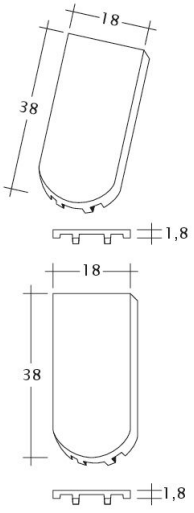


Drawing SAKRAL Flaechenluefter

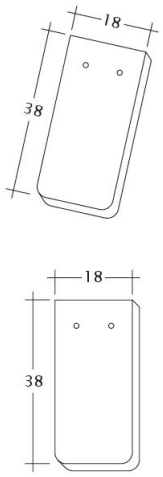


Drawing SAKRAL Ger-1-1

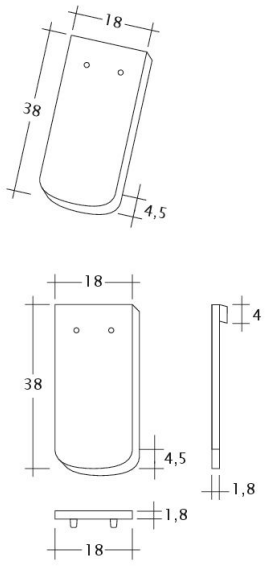


Drawing SAKRAL Korb-1-1

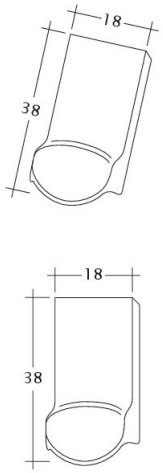


Drawing SAKRAL LUEFTZ

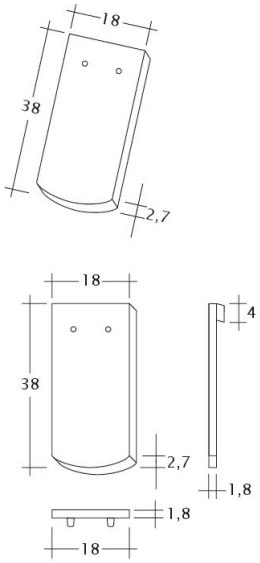

Drawing SAKRAL Seg-1-1

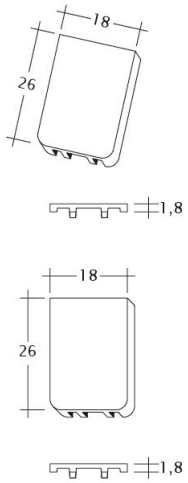

Drawing SAKRAL Traufluefter

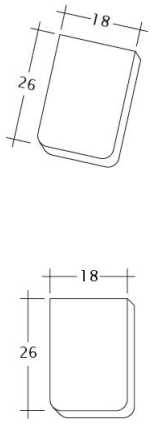

Drawing SAKRAL Traufziegel